



● **HD HIGH VISCOSITY SCREW PUMP**

Applications

From high to low viscosity liquid › aggressive or neutral liquid › polymer › lubricator › ink › shampoo › PU & PVC › resin and so on.

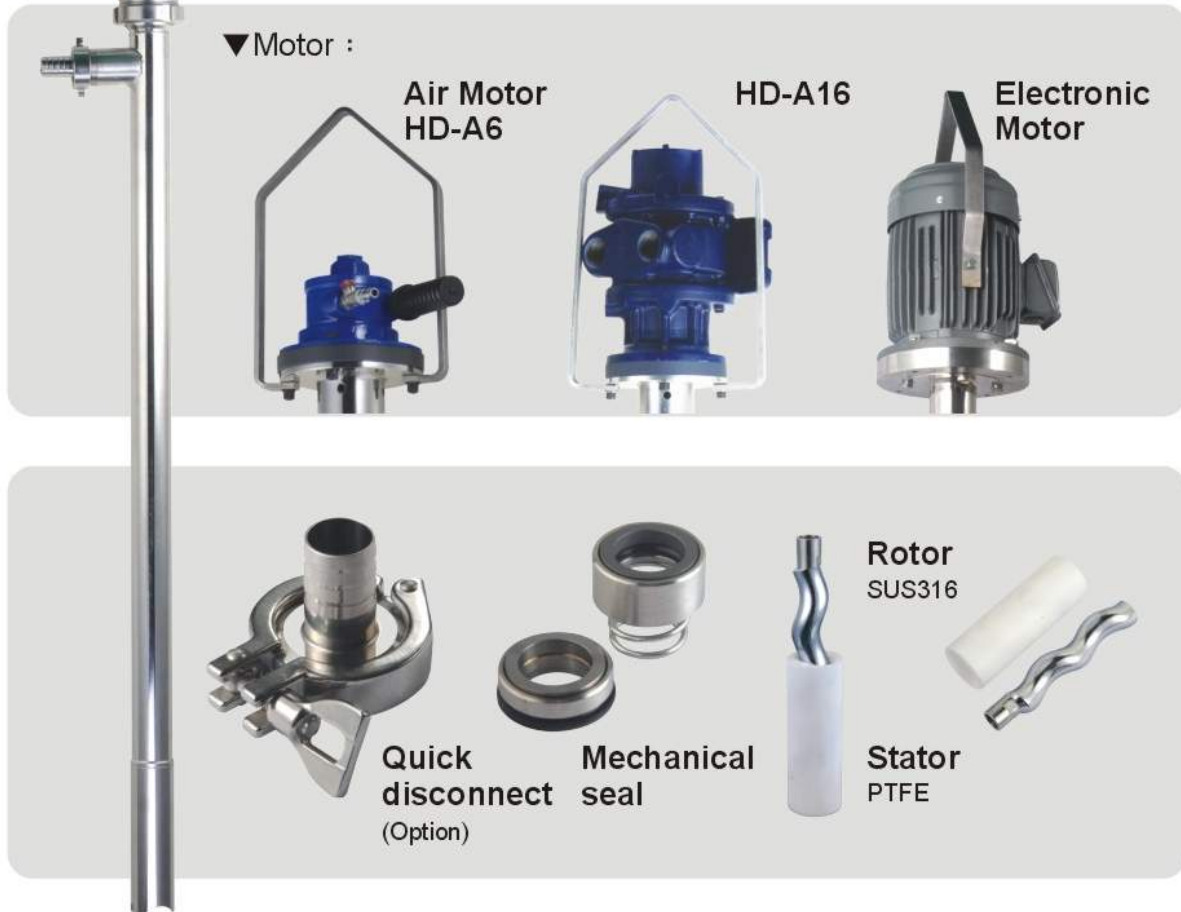

HD-HV High viscosity series	
Model: HD-SS700-HV	Size : 700mm (27") 5 GAL. Bottles
HD-SS1000-HV	1000mm (39") 55 GAL. (200L) Drum
HD-SS1200-HV	1200mm (42") Barrels & Tanks
Max. Temp. : 120°C/248°F	
Outlet Dimension : 27.5mm / 33mm	
Pump : SUS304 / SUS316	
Rotor : SUS316	
Stator : PTFE	
Max. Viscosity : 100,000cps	
Mechanical Seal : SIC	
O-ring : PTFE	
Max. Flow Rate : 90L/min (Tested with 2000cps epoxy and HD-A6 air motor)	
Max. Pressure : 10bar	
Weight : 12kg	

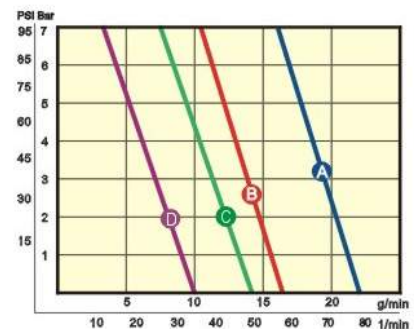

HD-A16: A-7bar B-4bar
HD-A6: C-7bar D-4bar

Test conditions:

- Viscosity: 5,000cps
- Performance curves may vary ±10% based on applications.